

Zirconia Sintering Furnace



Zirconia Sintering Furnace

Description:


- 1, Continuous working temperature 1600C.
- 2, It has chimney can discharge dirty air when sintering zirconia to ensure get glossiness teeth.
- 3, It can be remote control by Mobile,intelligent Work.
- 4, High purity heating element no pollution for zirconia



Specification:

Name	Zirconia Sintering Furnace
Voltage	110/220V 50/60HZ
Power	2kw
Heating Rate	0-20.C /min
Max.Temp.	1700C
Work.Temp.	1600C
Temp.accuracy	±1°C
Uniformity of Temp.	±5°C
Heating elment	High purity MoSi2 Rod no pollution for zirconia teeth
Furnace Shell	1,Double Shell scture with fans cooling system eensure the temperature of furnace surface is below 40.c. 2,Furnace has chimney to discharge dirty air when sintering zirconia to ensure get glossiness products
Furnace Chamber Material	High quality alumina ceramic fiber,light weight/better insulation/energy save
Temperature Alarm	1,Over Temperature Alram 2,Broken thermalcouple alarm
Temperature control	1,PID automatic control with 32 segment program; 2,7"Touch screen; 3,Prestore 10pcs sintering curve for bridges and crown; 4,It can be romote control by Mobile,ingelligent work;
Working base	Automatically lift up and down
Thermocouple	B Type
Packing Size	650*510*1050mm
Packing Weight	98 KG(Wooden box packing)
Warranty	One Year Except heating element becasue it is consumables


Products Details:

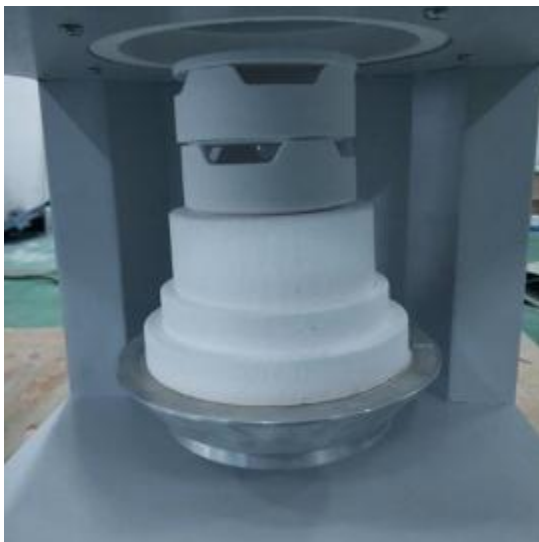

Cases:



Spare Parts:

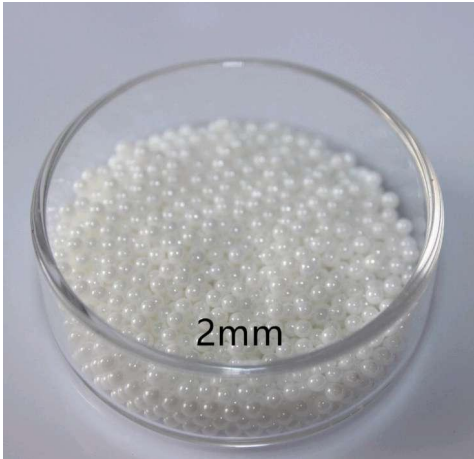

Packing: Strong Wooden Box



After sale services:

We always provide technical online service. You can contact us at any time;